

GEAR MOTOR

977



DESCRIPTION

High-performance **SYNCHRONOUS GEAR MOTOR** with compact dimensions.

It consists of a motor body with two possible rotation speeds (1000-750 RPM) and a highly compact, durable gearbox housing capable of matching with various reduction stages.

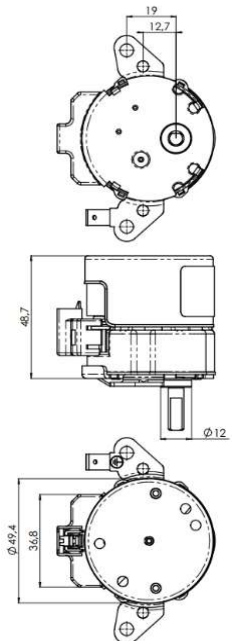
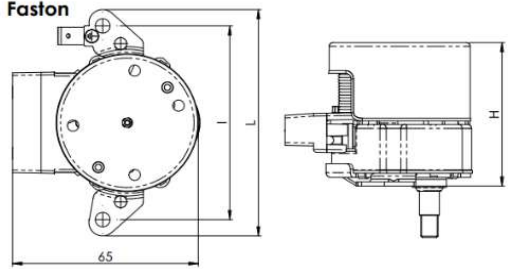

The final output of the gear motor can be configured with a countless number of shafts, allowing for the most suitable solution based on customer requirements and the specific application.

The electrical connection is RAST 2.5.

PERFORMANCE

VOLTAGE	V	100	110/120	230	220/240
FREQUENCY	Hz	50/60	50 - 60	50	50/60
POWER INPUT	W	8	6 - 8	8	8
TORQUE	Ncm	125/115	40 - 140	35 - 190	36 - 300
MAX WORKING TEMPERATURE	°C	120	60 - 85	60 - 85	60 - 105
INSULATION CLASS	-	H	H - F	H - F	H
SPEED	RPM	9/10,5	8,6 - 42	6 - 42	4,8 - 42

OVERALL DIMENSIONS

STANDARD DIMENSIONS	VARIABLE DIMENSIONS
	Type connection: Faston  Rast 2.5  L: 82 / 64 / 53 L: 70 / 57,2 / 47,6 H: 51,8 / 49,3

Our products can be ENEC, UL and CSA certified.

We move ideas